

FRAME FGL30040**WINDING 6S****MODELS FGL30040**

REF: FGL30040W6S-1 SEP 2020

WINDING DETAILS

| | | | |
|-------------|----|------------------|-----|
| Code | 6S | Insulation class | H |
| Phase | 3 | Leads | 4 |
| Pole number | 4 | Pitch | 2/3 |

MECHANICAL DETAILS

| | |
|---------------------|------------------------------|
| Standard protection | IP23 |
| Overspeed | rpm 2250 |
| Air flow 50Hz/60Hz | m ³ /s 0.25 / 0.3 |

EXCITATION DETAILS

| | | |
|---------------------------------|--------------|------------|
| Excitation system | SHUNT | PMG |
| AVR model | R120 | R180 |
| Sustained short-circuit current | - | 270%:5s |
| Steady state voltage regulation | ±1.0% | ±1.0% |

WAVEFORM

| | |
|--|------|
| <i>Line voltage on no load or balanced linear rated load</i> | |
| Total harmonic content THC | < 2% |
| Telephone influence factor TIF (NEMA) | < 50 |
| Telephone harmonic factor THF (IEC) | < 2% |

LINE VOLTAGE*No overvoltage tolerance for 440V 50Hz excitation level*

| Frequency / speed | V | 50Hz / 1500rpm | | | | 60Hz / 1800rpm | | | | | | |
|-------------------|---|----------------|-----|-----|-----|----------------|-----|-----|-----|-----|-----|--|
| | | 380 | 400 | 415 | 440 | 380 | 400 | 416 | 440 | 460 | 480 | |
| Star | | | | | | | | | | | | |

RATING*Power factor 0.8, Altitude <=1000m*

| | | | | | | | | | | | | |
|------------------------|---------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Class H rise BR | 125/40 | kVA | 105 | 105 | 105 | 95 | 103 | 112 | 119 | 120 | 126 | 131 |
| | | <i>kW</i> | 84 | 84 | 84 | 76 | 82 | 89 | 95 | 96 | 101 | 105 |
| Class H rise PR | 150/40 | kVA | 111 | 111 | 111 | 100 | 109 | 118 | 127 | 128 | 134 | 139 |
| | | <i>kW</i> | 89 | 89 | 89 | 80 | 87 | 95 | 101 | 102 | 107 | 111 |
| Class H rise PR | 163/27 | kVA | 116 | 116 | 116 | 104 | 113 | 123 | 131 | 132 | 139 | 144 |
| | | <i>kW</i> | 92 | 92 | 92 | 83 | 91 | 98 | 105 | 106 | 111 | 115 |
| Class F rise BR | 105/40 | kVA | 96 | 96 | 96 | 86 | 94 | 102 | 109 | 110 | 115 | 119 |
| | | <i>kW</i> | 76 | 76 | 76 | 69 | 75 | 81 | 87 | 88 | 92 | 95 |

EFFICIENCIES*Power factor 0.8*

| | | | | | | | | | | | | |
|------|------------|---|------|------|------|------|------|------|------|------|------|------|
| 110% | Class H BR | % | 90.3 | 90.2 | 89.7 | 88.6 | 91.1 | 91.1 | 91.1 | 91.4 | 91.2 | 90.9 |
| 100% | Class H BR | % | 90.8 | 90.6 | 90.2 | 88.9 | 91.5 | 91.5 | 91.5 | 91.7 | 91.6 | 91.3 |
| 75% | Class H BR | % | 91.9 | 91.5 | 91.0 | 89.2 | 92.3 | 92.4 | 92.4 | 92.4 | 92.2 | 91.9 |
| 50% | Class H BR | % | 92.3 | 91.7 | 90.9 | 88.2 | 92.5 | 92.6 | 92.6 | 92.4 | 92.1 | 91.6 |
| 25% | Class H BR | % | 90.6 | 89.3 | 87.9 | 83.2 | 90.4 | 90.5 | 90.5 | 89.8 | 89.3 | 88.4 |

CHARACTERISTIC PARAMETERS*Reactance base class H BR rating*

| | | | | | | | | | | | | |
|----------|--|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| K_c | Short-circuit ratio | | 0.34 | 0.44 | 0.54 | 0.88 | 0.23 | 0.24 | 0.26 | 0.31 | 0.36 | 0.42 |
| X_d | D-Axis synchronous reactance (unsaturated) | pu | 3.97 | 3.59 | 3.33 | 2.67 | 4.68 | 4.58 | 4.52 | 4.07 | 3.90 | 3.72 |
| X'_d | D-Axis transient reactance (saturated) | pu | 0.17 | 0.16 | 0.14 | 0.12 | 0.20 | 0.20 | 0.20 | 0.18 | 0.17 | 0.16 |
| X''_d | D-Axis sub-transient reactance (saturated) | pu | 0.103 | 0.093 | 0.087 | 0.069 | 0.122 | 0.119 | 0.117 | 0.106 | 0.101 | 0.097 |
| X_q | Q-Axis synchronous reactance (unsaturated) | pu | 2.03 | 1.83 | 1.70 | 1.36 | 2.39 | 2.33 | 2.31 | 2.08 | 1.99 | 1.90 |
| X''_q | Q-Axis sub-transient reactance (saturated) | pu | 0.221 | 0.199 | 0.185 | 0.148 | 0.260 | 0.254 | 0.251 | 0.226 | 0.217 | 0.207 |
| X_2 | Negative-sequence reactance (saturated) | pu | 0.162 | 0.146 | 0.136 | 0.109 | 0.191 | 0.187 | 0.184 | 0.166 | 0.159 | 0.152 |
| X_0 | Zero-sequence reactance (independent) | pu | 0.007 | 0.006 | 0.006 | 0.005 | 0.008 | 0.008 | 0.008 | 0.007 | 0.007 | 0.007 |
| T'_d | D-Axis transient time constant | ms | | 100 | | | | | | 100 | | |
| T''_d | D-Axis sub-transient time constant | ms | | 10 | | | | | | 10 | | |
| T_{do} | D-Axis open-circuit time constant | ms | | 2309 | | | | | | 2309 | | |
| T_a | Armature time constant | ms | | 15 | | | | | | 15 | | |
| T_r | Voltage recovery time | ms | | < 500 | | | | | | < 500 | | |

EXCITATION VOLTAGE AND CURRENT

| | | | | | | | | | | | |
|-------------------------------|---|------|------|------|------|------|------|------|------|------|------|
| No load excitation voltage | V | 7.7 | 9.3 | 11.0 | 15.1 | 5.0 | 5.5 | 6.1 | 6.9 | 7.9 | 9.2 |
| No load excitation current | A | 0.66 | 0.80 | 0.94 | 1.30 | 0.43 | 0.47 | 0.52 | 0.59 | 0.68 | 0.79 |
| Class H BR excitation voltage | V | 35.5 | 38.0 | 41.4 | 46.6 | 27.7 | 29.4 | 31.0 | 31.3 | 33.7 | 36.8 |
| Class H BR excitation current | A | 3.05 | 3.26 | 3.55 | 4.00 | 2.38 | 2.52 | 2.66 | 2.69 | 2.89 | 3.16 |

WINDING RESISTANCE*At 20°C*

| | | | | | | |
|-----------------------------------|---|-------|--|-----------------------|---|------|
| Stator line-to-line (series star) | Ω | 0.101 | | Exciter field - Shunt | Ω | 11.7 |
| Main field | Ω | 2.35 | | | | |

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

Manufactured for FG Wilson by Leroy Somer - Nidec.

FRAME FGL30040 WINDING 6S




MODELS FGL30040

REF: FGL30040W6S-1 SEP 2020


LOCKED ROTOR MOTOR STARTING CURVES

Power factor 0.6

50 Hz SHUNT

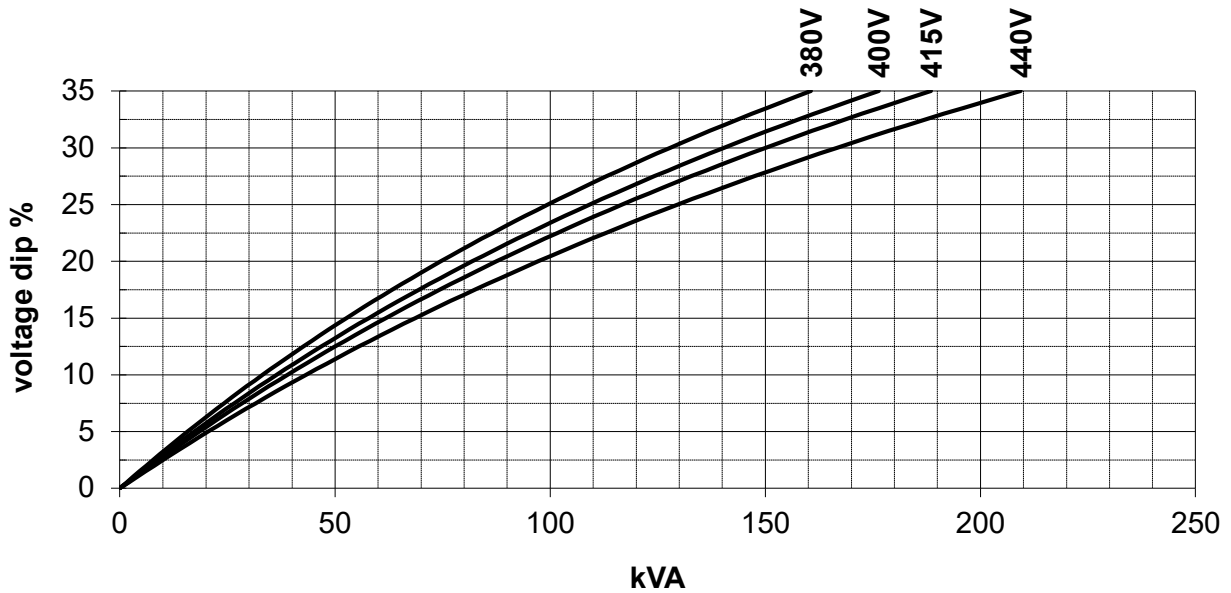

60 Hz SHUNT

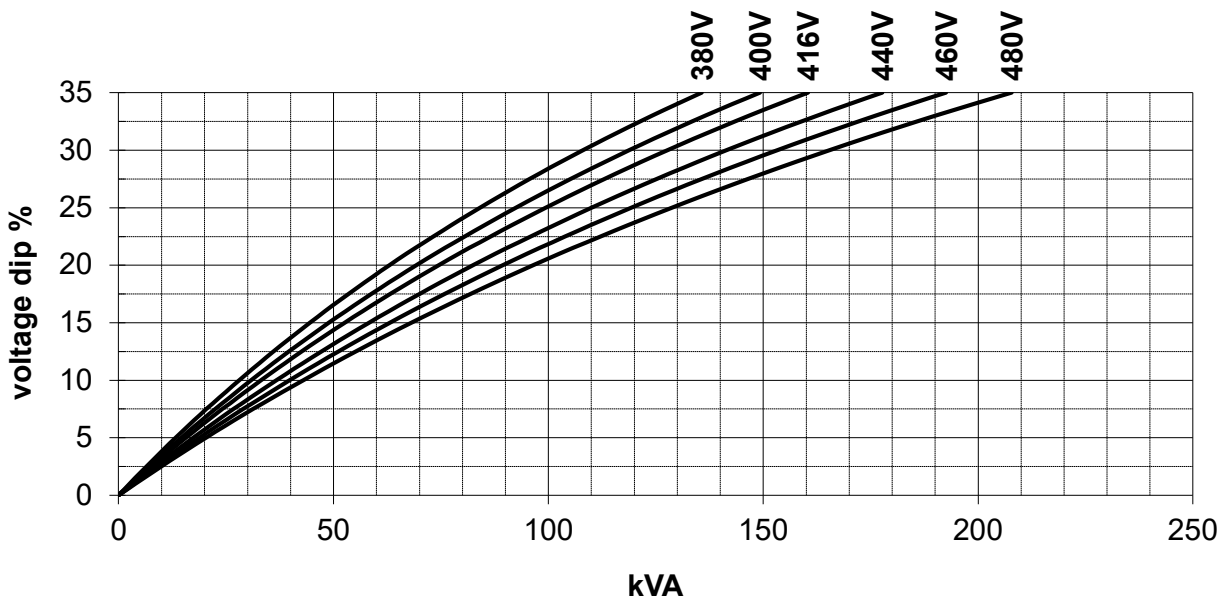

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.
Manufactured for FG Wilson by Leroy Somer - Nidec.

FRAME FGL30040 WINDING 6S




MODELS FGL30040

REF: FGL30040W6S-1 SEP 2020


LOCKED ROTOR MOTOR STARTING CURVES

Power factor 0.6

50 Hz PMG

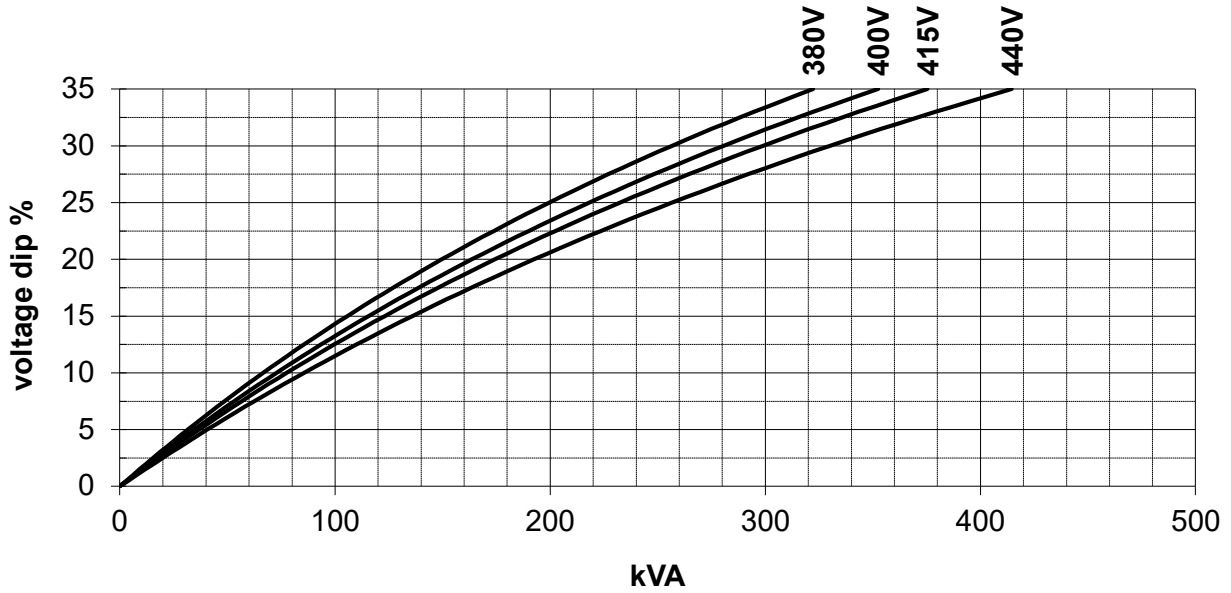

60 Hz PMG

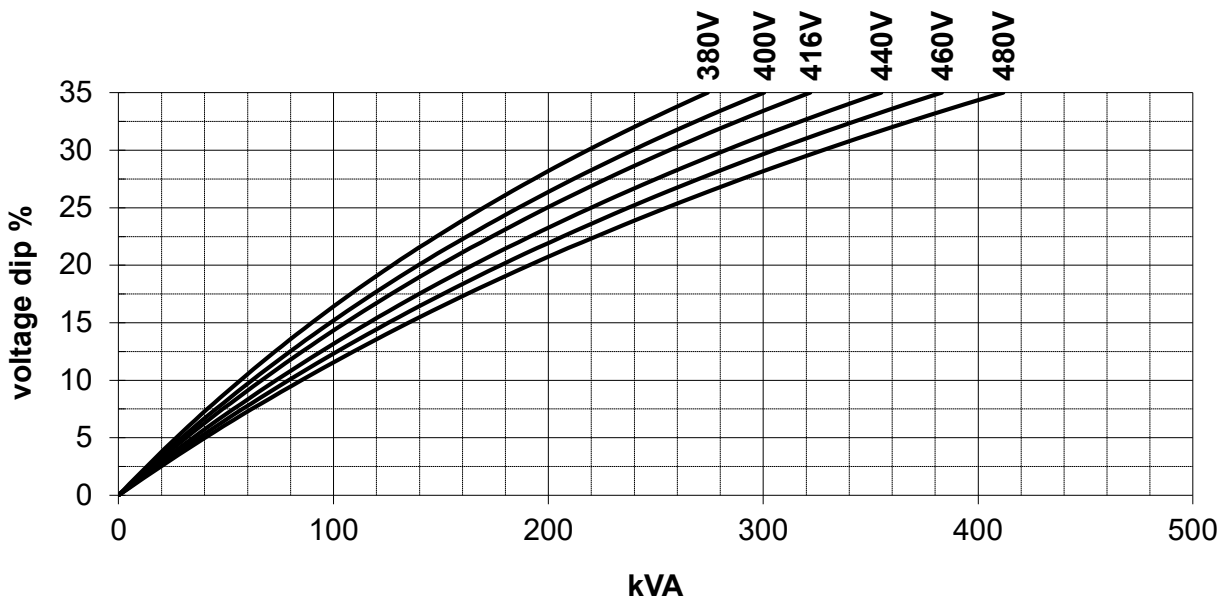

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.
Manufactured for FG Wilson by Leroy Somer - Nidec.

FRAME FGL30040 WINDING 6S



MODELS FGL30040


REF: FGL30040W6S-1 SEP 2020

THREE-PHASE SHORT-CIRCUIT DECREMENT CURVES

No-load excitation at rated speed

400V 50Hz, 480V 60Hz

Series star

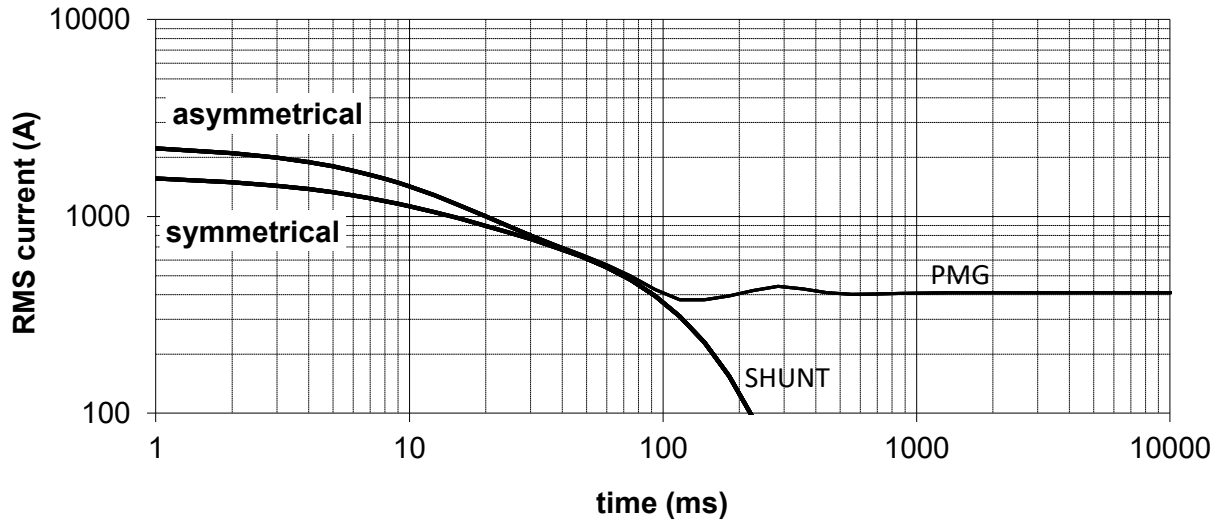

Multiplication Factors

| | | | | |
|------------------------------|------------|------------|------------|------------|
| 50Hz Voltages | 380 | 400 | 415 | 440 |
| Multiplication Factor | 0.95 | 1.00 | 1.04 | 1.10 |

Apply factor up to 2xT'd, remainder of curve unchanged

| | | | | | | |
|------------------------------|------------|------------|------------|------------|------------|------------|
| 60Hz Voltages | 380 | 400 | 416 | 440 | 460 | 480 |
| Multiplication Factor | 0.79 | 0.83 | 0.87 | 0.92 | 0.96 | 1.00 |

Apply factor up to 2xT'd, remainder of curve unchanged

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33
 Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.
 Manufactured for FG Wilson by Leroy Somer - Nidec.